



Waveguide Termination

WR34 (BJ260) Waveguide Matched Termination, ME-WT-WR28 21.7-33.0 GHz, 1 W, UBR260 Flange, Rectangular

QR code



Hangzhou Multipath Electronics Co., Ltd., Zhejiang, China

⚙️ Electrical & Environmental


| | | | |
|------------------------|-----------------|------------------------|-------------|
| Frequency Range | 21.7 - 33.0 GHz | Impedance | - |
| VSWR | 1.03 max | Input Avg Power | 1 W @ 25 °C |

⚙️ Mechanical & Product Information


| | | | |
|-----------------------|---------------------|-------------------------|---------------------------------------|
| Product Number | ME-WT-WR34, P-Grade | Waveguide | WR34 (BJ260), UBR260 Flange |
| Waveguide Body | Copper, gold plated | Waveguide Cavity | Copper, electric conductive oxidation |
| Heat Sink | N/A | Net Weight | About 55.0 g |
| Operating Temp | -55 °C~+100 °C | | |

Outline dimensions

Dimensions(mm) Tolerance±1%

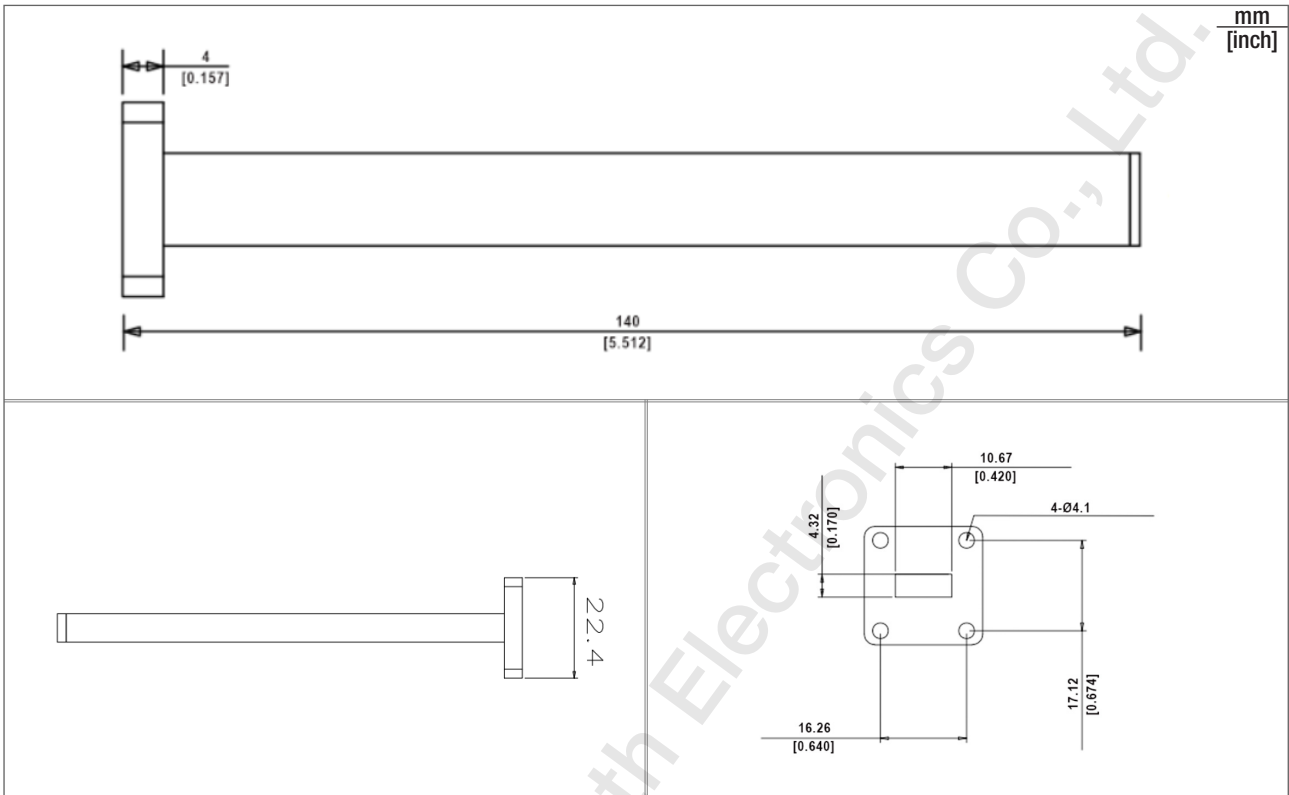


Typical Test Data

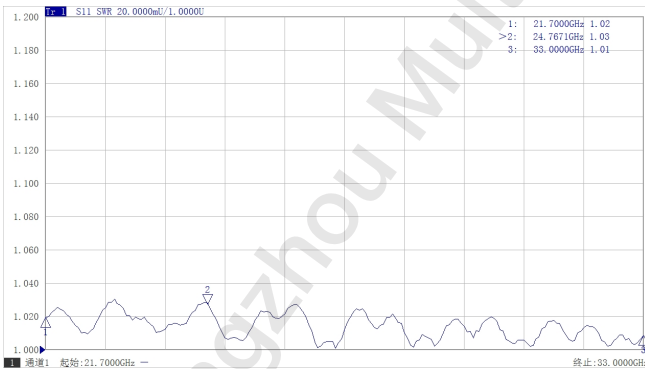

Customized connectors, dimensions, PIM, VSWR.

Notes: To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and dutycycle need to meet their requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve, derate linearly to 0.1W at 100°C.

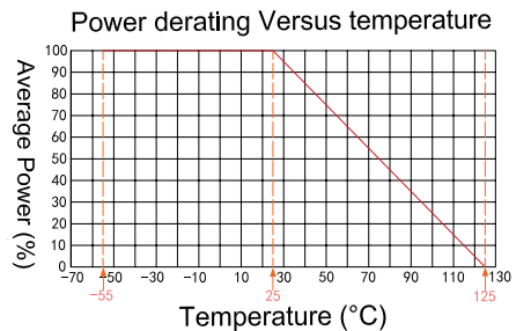

Multipath Electronics

Contact

+86-571-56201039

sales@multipath.cn

https://www.multipath-electron.com

Technical specifications in this datasheet are subject to change without notice. Actual products may differ from the shown images.