

# Waveguide Termination

WR75 (BJ120) Waveguide Matched Termination, ME-WT-WR75 9.84-15.0 GHz, 2 W, UBR120 Flange, Rectangular

QR code



Hangzhou Multipath Electronics Co., Ltd., Zhejiang, China

## ⚙️ Electrical & Environmental


Frequency Range	9.84 - 15.0 GHz	Impedance	-
VSWR	1.03 max	Input Avg Power	2 W @ 25 °C
Peak Power	-		

## ⚙️ Mechanical & Product Information


Product Number	ME-WT-WR75, P-Grade	Waveguide	WR75 (BJ120), UBR120 Flange
Waveguide Body	Aluminum, grey painted	Waveguide Cavity	Aluminum, electric conductive oxidation
Heat Sink	N/A	Net Weight	About 62.0 g
Operating Temp	-55 °C~+100 °C		

## Outline dimensions

Dimensions(mm) Tolerance±1%

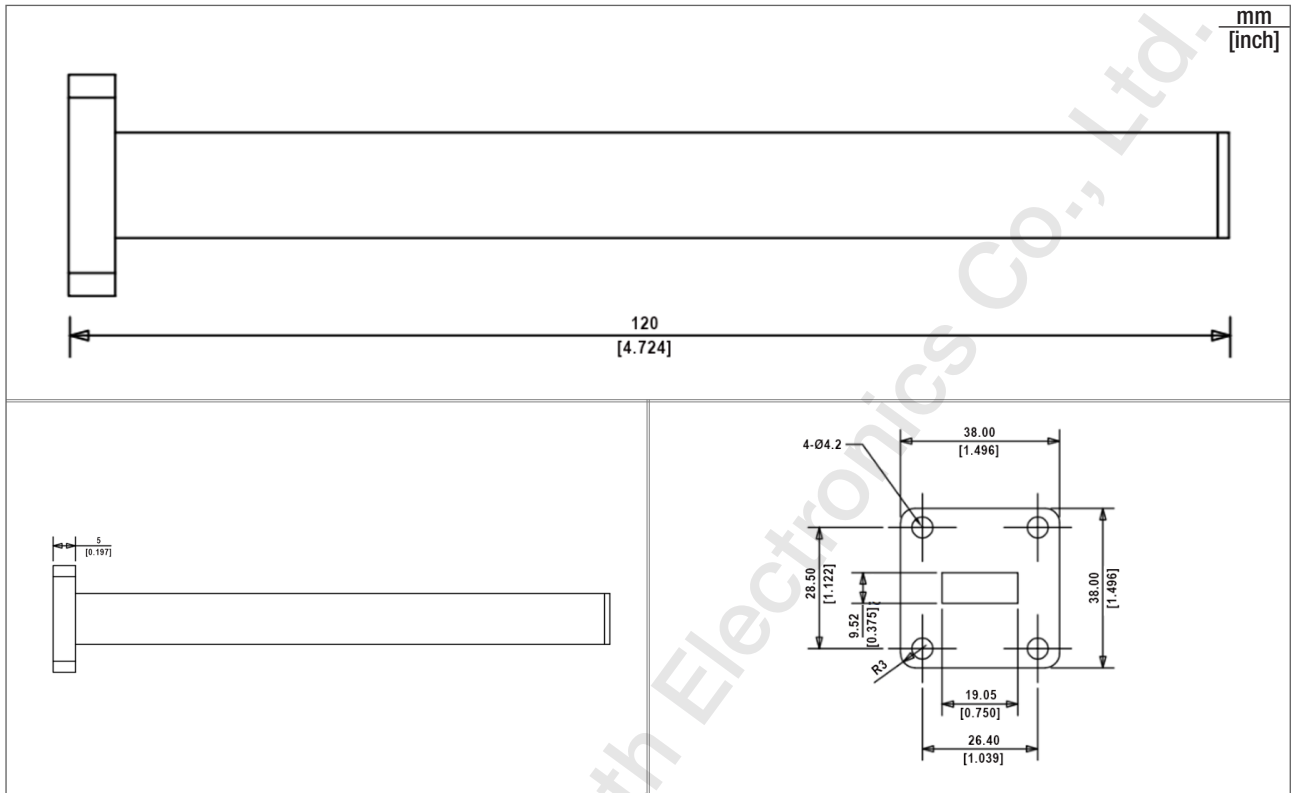


## Typical Test Data

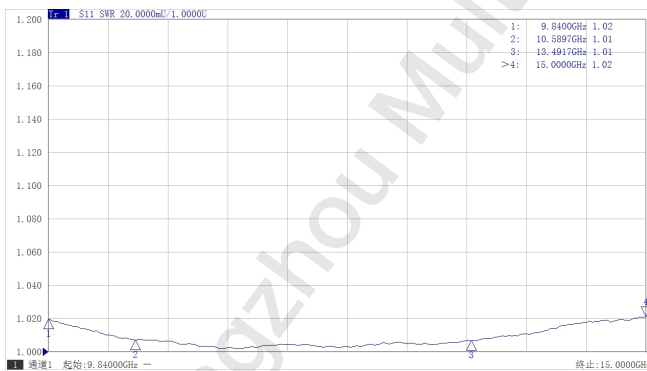

Customized connectors, dimensions, PIM, VSWR.

Notes: To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and dutycycle need to meet therequirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve,deratelinearlyto 0.1W at 100°C.

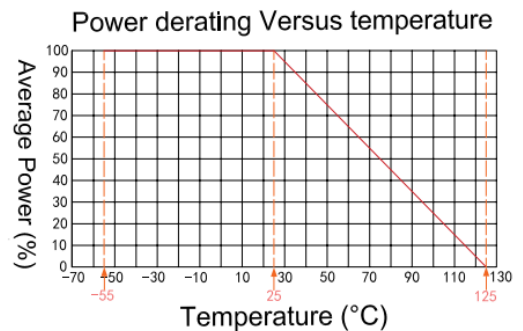

Multipath Electronics

## Contact

+86-571-56201039

sales@multipath.cn

<https://www.multipath-electron.com>

Technical specifications in this datasheet are subject to change without notice. Actual products may differ from the shown images.